



Product Data Sheet

GeoWAN 2.0 PT100 RTD Sensor Node

The GeoWAN 2.0 PT100 RTD Sensor Node allows precision temperature sensing in many different situations. It uses the integrated long range radio transceiver to report its measurements through Senceive's GeoWAN wireless communications network to a GeoWAN Gateway.

Successfully used in these temperature monitoring applications:

- Steel structures
- Rail, for critical rail temperature alerting
- Concrete structures, including during curing
- Heating, Ventilation and Air Conditioning (HVAC) systems
- Ambient/environment

Key features

- Waterproof, robust connectors for simple installation
- Accuracy of ± 0.1 °C
- Integrated long life battery
- Up to 12 year battery life
- Versatile mounting options
- Waterproof to IP66 / IP68

Integrated software:

- WebMonitor (Data visualisation)
- Senceive.io (Data management)
- NFC (In-field hardware management tool)

GeoWAN 2.0 PT100 RTD Sensor Node



Physical Specifications

Parameter	Value
Dimensions (L x W x H)	120 x 105 x 64 mm
Total Mass	448 g (approx.) including D-size battery
Housing Material	PC plastic body and lid cover with die cast aluminium base
Mounting Options (size and number of holes for mounting plate connection)	M4 holes in bottom, Plates and brackets available for magnetic fixing, trackbed, stake and pole mounting, and many other applications
Internal Protection Marking	IP66 IP68 (1m for 24 hours)
Operating Temperature Range	-40°C to +80°C

Internal Battery

Parameter	Value
Battery Type	Lithium Thionyl Chloride, non-rechargeable, D-cell
Nominal Voltage	3.6 V
Nominal Capacity	19000 mAh
Typical Battery Life	12 years at 30 minute reporting intervals when using radio preset 1 <i>Consult with Senceive for your application</i>
Recommended options*	Senceive: SP-C03282-1 Saft: LS33600

*Batteries from other suppliers may work but we provide no guarantee on performance

RTD Interface

Parameter	Value
Connector	M12 Female 5-pole A-coded Screw-in Type
Accuracy	±0.1°C
Resolution	0.01°C
Stimulus Type	Constant Current

GeoWAN 2.0 PT100 RTD Sensor



GeoWAN Radio Specifications

Parameter	Value
Communication Type	Star Topology
Frequency Band (868 variant)	863 MHz - 870 MHz ISM Band
Frequency Band (902 variant)	902 MHz - 928 MHz ISM Band
Frequency Band (915 variant)	915 MHz - 928 MHz ISM Band
Frequency Band (923A variant)	922.0 MHz - 923.4 MHz ISM Band
Frequency Band (923B variant)	923.2 MHz - 924.6 MHz ISM Band
Maximum Transmit Power (868 variant)	14 dBm conducted
Maximum Transmit Power (902 variant)	18 dBm conducted
Maximum Transmit Power (915 variant)	18 dBm conducted
Maximum Transmit Power (923A variant)	14 dBm conducted
Maximum Transmit Power (923B variant)	14 dBm conducted
Internal Antenna Maximum Gain	+0.17 dBi (internal)
Range (with internal antenna)	Up to 12 km depending on the environment Trackbed: 1 km Tunnel: 2 km Urban: 2.3 km Line of Sight: 12 km <i>Consult with Senceive for your application and/or external antenna options</i>

Sampling and Reporting

Parameter	Value
Maximum Reporting Frequency	30 seconds
Sample Storage*	Stores up to 90,000 sampling cycles in a circular buffer

*Retrieval is only available locally via NFC. The unit is not intended to operate as an offline data logger and requires a network connection to maintain an accurate clock

Certifications - to be obtained

- Tested to conformity with all the essential requirements of the Radio Equipment Directive 2014/53/EU and RoHS Directive 2011/65/EU
- FCC Grant of Equipment Authorization
- ACB ISSED Canada Certificate: 24373-LR3N
- RCM (Australia and New Zealand)


GeoWAN 2.0 PT100 RTD Sensor Node



RTD Sensor

Parameter	Value
Sensor type	PT100 class A (EN IEC 60751)
Accuracy @0°C	±0.15°C
Accuracy (EN IEC 60751 compliant)	(0.15 + 0.002 t)°C
Operating Temperature Range	-70 to +230°C
Wire configuration	3 wires
Cable outer material	PFA
Probe dimensions: PT100R PT100S PT100M	Length 40mm, Diameter 6mm Length 40mm, Diameter 6mm, Leaf 25x15mm Magnet with M5-eye
Connector	M12 male plug, straight, A-coded, 5-pin/position


PT100S

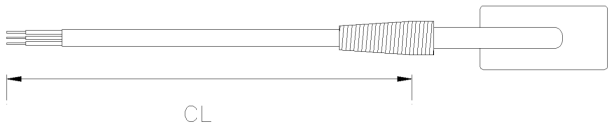

PT100R



PT100M

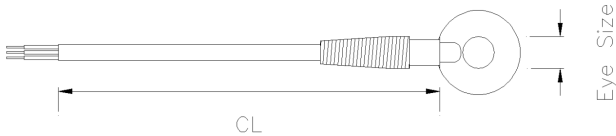

©Senceive 2026

GeoWAN 2.0 PT100 RTD Sensor Node



Ordering Information and Accessories

Model	Description
L3N1-RTD(868)	GeoWAN 2.0 PT100 RTD Sensor Node Europe
L3N1-RTD(902)	GeoWAN 2.0 PT100 RTD Sensor Node North America
L3N1-RTD(915)	GeoWAN 2.0 PT100 RTD Sensor Node Australia, New Zealand
L3N1-RTD(923A)	GeoWAN 2.0 PT100 RTD Sensor Node Asia 923A Region
L3N1-RTD(923B)	GeoWAN 2.0 PT100 RTD Sensor Node Asia 923B Region

Accessories	Description
FS-PT100R-xxxxx	Round Bead Temperature Sensor For fluid temperature (and air temperature) sensing or for drilled holes xxxxx is the cable length in millimetres
FS-PT100S-xxxxx	Surface Mount Temperature Sensor Metal leaf can be glued or spot welded to a surface xxxxx is the cable length in millimetres
FS-PT100M-xxxxx	Magnetic Temperature Sensor Surface temperature of metal structures xxxxx is the cable length in millimetres
FF-MP-S360N	Swivel mounting kit with 360-degree adjustment range Screw directly to vertical walls
FF-MP-V (Order with FF-MP-S360N)	Vertical mounting plate Use U-bolts to fix to poles or stakes Use glue to fix to walls where drilling is not permitted
FF-MP-RSN	G2.0 Right angle swivel mount Screw to concrete tunnel linings and inclined walls
FF-MP-T2N	G2.0 Trackbed two-part mounting plate kit
FF-MP-M2N	G2.0 Two-part magnetic mounting kit High degree of adjustability, perfect for cast iron lined tunnels
FF-MK-N	G2.0 Magnetic mounting kit Perfect for steel or cast iron structures
FS-PT100CON11	Screw terminals - Connector for PT100 sensor (1-wire, 1 temp)
SP-C03282-1	G2.0 ER34615 3.6V 19Ah Battery Senceive provided, suitable for GeoWAN 2.0 nodes
FA-G2-SMA	Replacement G2.0 Lid for External Antenna (SMA)